
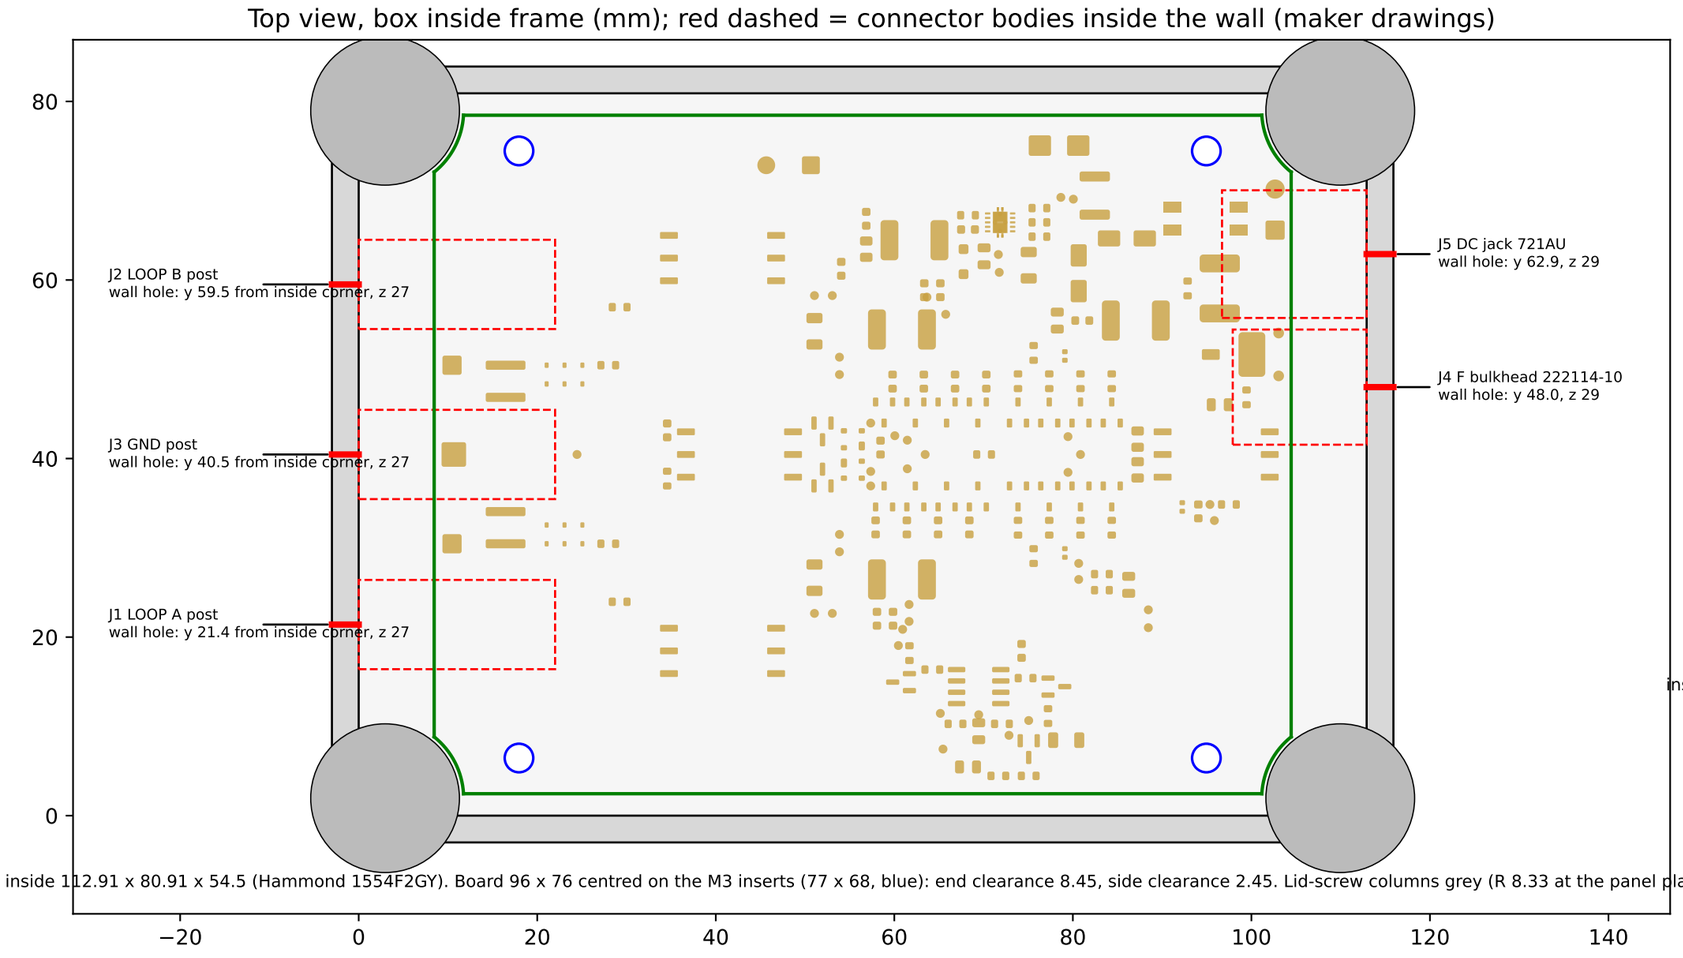


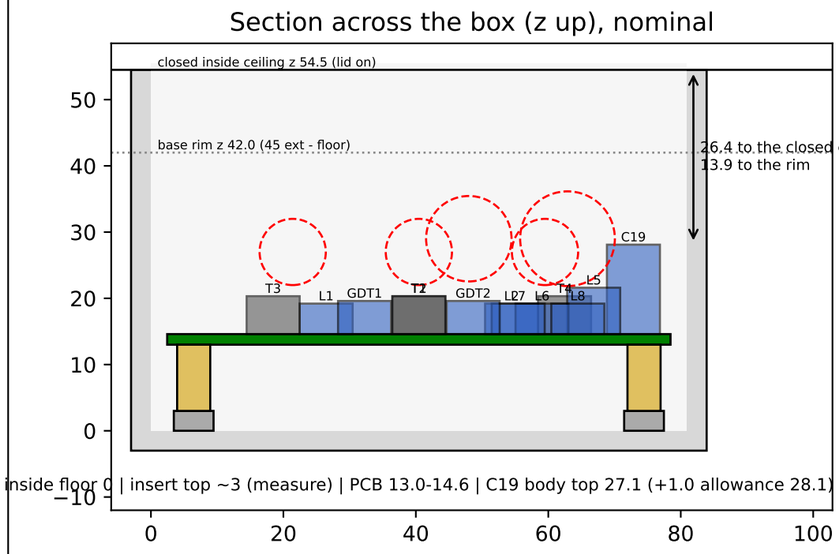

inside floor 0 | insert top ~3 (measure) | PCB 13.0-14.6 | C19 body top 27.1 (+1.0 allowance 28.1)

inside 112.91 x 80.91 x 54.5 (Hammond 1554F2GY). Board 96 x 76 centred on the M3 inserts (77 x 68, blue): end clearance 8.45, side clearance 2.45. Lid-screw columns grey (R 8.33 at the panel plane).

MECHANICAL HANDOFF, WB-2 board sha 877c82ec, drawing rev C (wall holes from the connector maker drawings) (nominal; NOT a drilling template until the datums are measured)

1. Hammond 1554F2GY (IP66). Datums: inside floor z0; insert top ~3 (Hammond 6.00 is from the bottom datum, floor ~3 assumed: MEASURE); base rim ~42; closed inside ceiling 54.5.
2. PCB 96 x 76 x 1.6, corner bites R 8.8 on the lid-screw columns. Board edges sit 8.45 mm from the end walls and 2.45 mm from the side walls (nominal, before draft).
3. Left wall: Cliff CL1505 posts (14 mm knobs, 7 mm hole) J1/J3/J2 at box y 21.405/40.455/59.505 (19.05 mm = 3/4 in pitch, dual-banana), 12.4 mm above the PCB top.
   Board pads stay at board y 28/38/48; the post tails run over the protection region x 0-19.
   Wires: J1/J2 0.5 mm2, J3 1.0 mm2 straight to its pad at (2.2, 38); keep all three short and away from the transformer region.
4. Right wall, centres 14.4 mm above the PCB top: J4 222114-10 (12.9 flange inside, 3/8-32 x 16.5 out) at box y 48.0; J5 721AU (14.3 body inside, 8.0 hole) at box y 62.9,
   clear of the lid-screw column (body edge 70.05 vs column 70.6). 721AU bushing is 4.6 mm: on the 3 mm wall check nut + washer engagement (counterbore inside if short). RG-179 <= 50 mm,
   laced at the two J4 holes; it must not cross the input rows. J5 twisted pair stays inside the L5 / J5 entry region; the sleeve (CBL_GND) is never bonded to the box or board ground elsewhere.
5. C19 EEU-FC1V221B 10 x 12.5 is the tallest part: body top z 27.1, envelope with +1.0 mm allowance z 28.1; 26.4 mm to the closed ceiling, 13.9 mm to the base rim.
6. All four M3 screws stay accessible from above; nothing is mounted over H1-H4.